## WATERMYRK

BROOKLYN, NEW YORK

## Chelsea 125-HAF


Wall Mounted Showerhead



- Flow Rate: 1.75 GPM at 80 psi
- Adjustable Plastic Nozzles
- Two Lever-Controlled Spray Patterns: Jet and Soak
- Includes: SS-403SQAF and SH-803.
- Professional Installation Required.

Available in all finishes shown on the Watermark Designs website



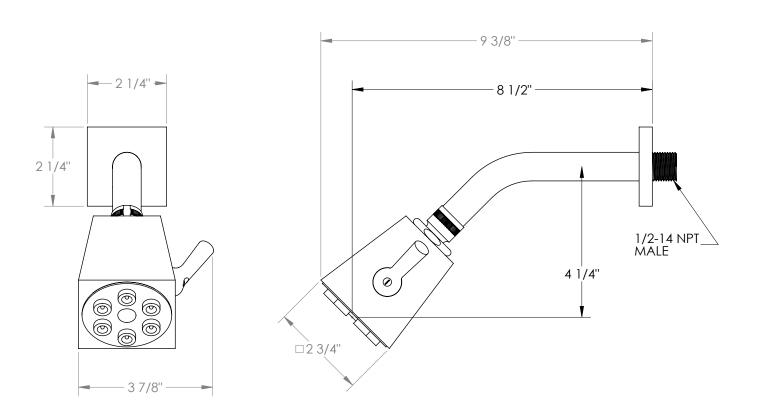

Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings". Watermark Designs reserves the right to make revisions without notice to product specifications. All product dimensions are nominal.