
70-8.3-RNS4

Floor Mounted Tub Group with Hand Shower

Hand Shower Flow Rate: 1.75 GPM Requires concealed rough SS-FL8.3

Note: Some building codes require remote pressure balance valves for anti-scald

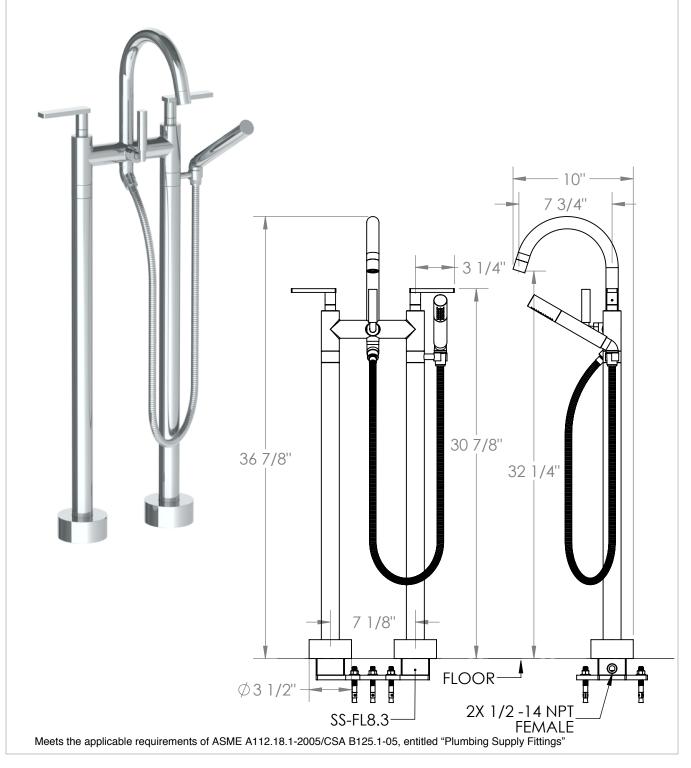

WATERMYRK DESIGNS 9/4/2019