

BROOKLYN, NEW YORK

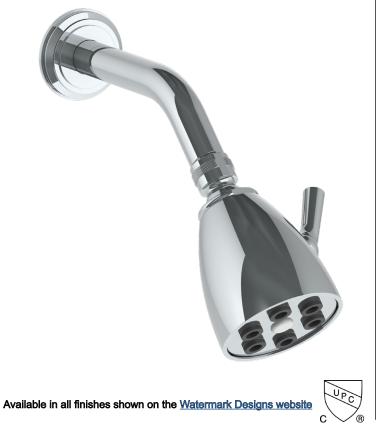

Stratford 321-HAF Wall Mounted Showerhead

- Flow Rate: 1.75 GPM at 80 psi
- Adjustable Plastic Nozzles
- Two Lever-Controlled Spray Patterns: Jet and Soak
- Includes: SS-403TRAF and SH-503.
- Professional Installation Required.

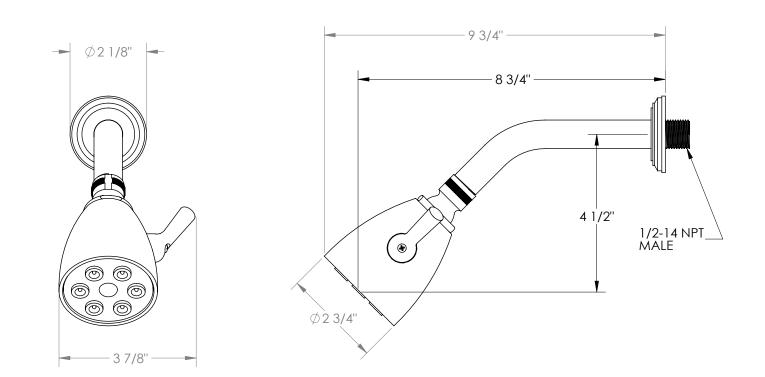

 Meets the applicable requirements of ASME A112.18.1-2005/CSA B125.1-05, entitled "Plumbing Supply Fittings".
 06/2023

 Watermark Designs reserves the right to make revisions without notice to product specifications. All product dimensions are nominal.
 06/2023